Windows **Plus** Online

Instant Design, Quote and Ordering

Survey Sheet

Stoned Sash Windows

Telephone: 02476 345525

Email: surveying@windowsplusonline.co.uk



Transom location from top frame to centre of transom. Does not include frame packers and joining strips.

$\overset{(\leftrightarrow)}{\frown}$

Mullion location from edge of frame to centre of mullion. Does not include frame packers and joining strips.


Information Key

- T = Toughened Glass
- L = Laminated Glass
- XX = Knock On 20 | 35 | 50
- D = Dummy Vent
- J-S = Joining Strip
- TV = Trickle Vent

Stone bays / sash windows are measured differently to most windows. The normal way is to measure the width of the window, find the largest size and then add approximately 10mm.

Height, some stone bays will have cills some will not. Depending on what is currently installed , measure the height from under the cill if there is one in place and then add 5mm to the height

The reason for adding to the width and height is to allow for the window to sit behind the stone work giving a nice finish.

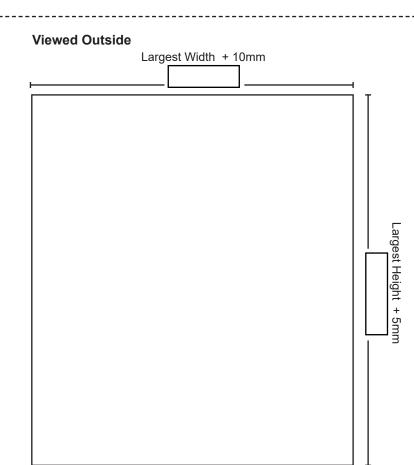

Please see information pages for a measuring guide

Customer Details	Frame Colour:
Reference:	Cill: None Stub 150 180 225
Name:	Handle Colour:
Address	Glazing Details
Telephone:	A / B / None Rated
Email:	Clear Obscure (Type:)
	Decoration